

iBright



*Phone not included

SC830
iBright Speaker with Wireless Charger

User Manual

Thankyou for purchasing the SC830 iBright Speaker with Wireless Charger.
Please read prior to use and keep a copy for your records.
We hope you enjoy using our products!

Specification

Speaker output: 5W

Wireless charge: 10W fast charge

Bluetooth: V5.0

Wireless range: 10 metres

Driver: 2.0 inch full range

Battery: 3.7V 1800mAh rechargeable

Input: 5V/9V/12V DC

Material: plastic, silicon.

Compatibility

Compatible with Bluetooth enabled devices.

Wireless charge function is compatible with Qi enabled smartphones (ie iPhone and Android).

In the box

- 1 x Speaker with integrated wireless phone charger on top
- 1 x Type C Charge cable (length 1m)
- 1 x User Manual



*Phone not included

Safety Precautions

Read all the instructions carefully before using.


Check that the voltage marked on the rating label matches your mains voltage.

The speaker should not be taken apart or modified.


Do not place the speaker in constant sunlight or near naked flames such as fireplace, lit candles, etc.

Never subject the speaker to high temperatures, damp or dusty environments, heavy vibrations or impacts.

User Manual

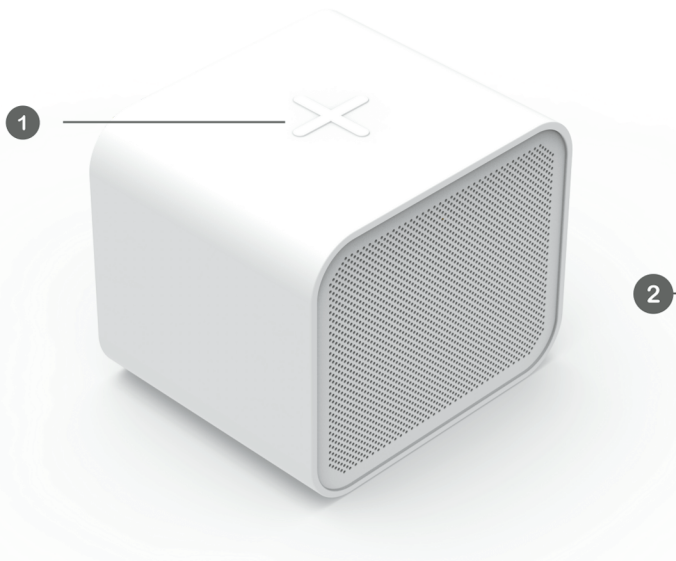

Top of speaker

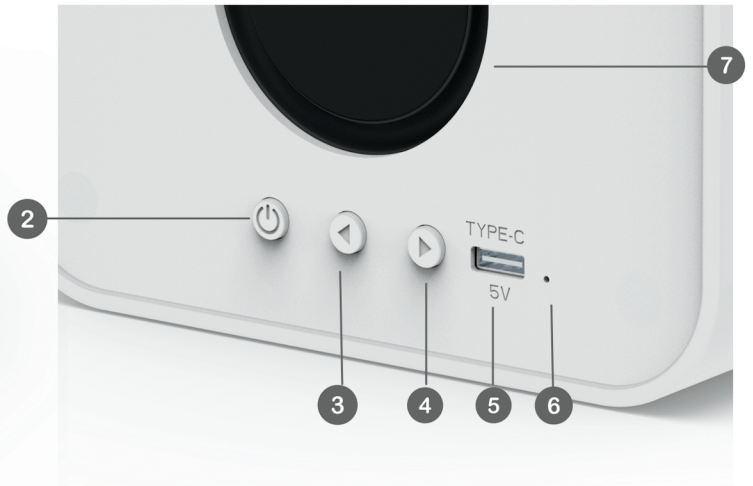

Back of Speaker

ITEM	FUNCTION
1.	Wireless Charge Port (Silicon Cross)
2.	Power Button (Power/Play/Pause)
3.	- Volume Button (Previous)
4.	+ Volume Button (Next)
5.	Type C Charge Port
6.	Charge LED Indicator
7.	Bass

User Manual

Charge the speaker before use.

1. Please use the supplied Type-C Cable provided to charge your SC830 speaker. Plug Type-C cable into back of speaker, and opposite end into either
 - PC/Laptop/Mac
 - USB Adapter (5V/9V/12V) or
 - QC 2.0 or QC3.0 power adapter (Note, power adapter NOT included)
2. Red LED turns ON during charging, then turns OFF after fully charged.
3. Unplug USB cable after fully charged.
4. Red LED twinkles when low power (<21%), with a warning sound.

Power button (power/play/pause) function

1. Long press the power button for approx. 2 seconds to turn device on/off. You should hear a starting chime.
2. When speakers are in TWS (True Wireless Stereo) mode, hold the button on either of the speakers to switch them off.
3. Quick press the button, to play or pause the music
4. Double click button to disconnect current Bluetooth pairing.

Left arrow <

Short press to decrease volume.

Long press to go back to previous song.

Right arrow >

Short press to increase volume.

Long press to go to next song.

Wireless Pairing

1. Turn on the speaker to be ready for pairing. After 1-2 seconds a chime sounds.
2. Go to Settings/Bluetooth function on your Bluetooth enabled smartphone/other device. Search for speaker and select the name "iBright SC830". Connect the speaker with the device.
3. The wireless pairing sound chimes once more after pairing is complete. LED turns blue on front of speaker.

Note:

1. Keep within 1 metre range when pairing speaker to Bluetooth enabled device. If pairing is not successful, turn off the speaker and try pairing again.
2. Paired devices will remember each other so there is no need to pair again unless pairing information is deleted.
3. To pair with a new device, follow steps 1-3 above after disconnected from existing device.

User Manual

TWS (True Wireless Stereo): pair 2 speakers


1. Make sure you have 2 x SC-830 speakers. Turn on both speakers together, then quickly double click "Power" buttons of both speakers. Both speakers will enter pairing mode to pair with each other first.
2. Wait for around 5-10 seconds until two speakers "beep" once in sequence, which means both speakers are now paired with each other. Host speaker will show flashing blue light. Sub-speaker will show solid blue light.
3. Next, activate Bluetooth function on your Bluetooth enabled device and pair with Speaker "SC-830".

You can now enjoy your music in True Wireless Stereo

Note:

- TWS works ONLY with 2 x SC-830 speakers.
- To disconnect existing TWS connection, double click "Power" button of either speaker. The sub-speaker will disconnect. The host speaker will keep playing music.
- If you want to establish TWS connection with 2nd speaker after you are already connected to one speaker, long press "Power" button to disconnect from your existing paired device, then follow steps 1-3 above.

User Manual

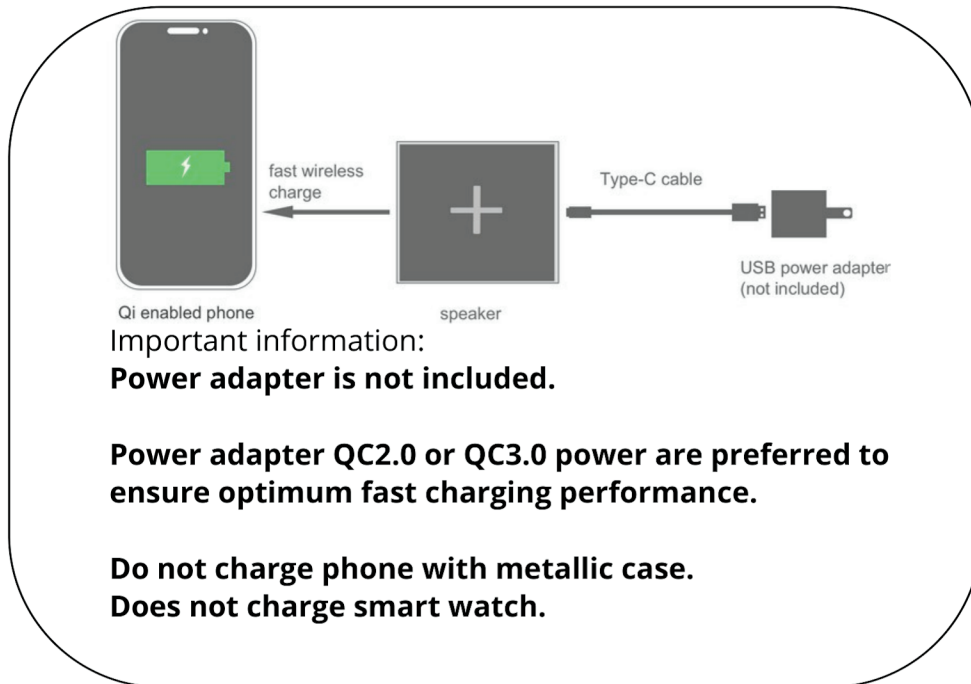

How to use Wireless Charge function

1. Connect to 5V/9V/12V USB Power Adapter (ie. using your smartphone's original power adapter).

Note: We recommend using a **QC2.0 or QC3.0 power adapter** to achieve best stability and fast charging performance.

Using a QC1.0 power adapter with output 5V/1A is NOT recommended. Using QC1.0 adapter may result in either overheating or slow charge. Charge power is lowered from 10W to 5W if using 5V/1A power adapter).

2. Place QI enabled phone or device on the silicon cross.

Phone or device will send indication image/sound when charge starts.
Speaker turns on "Green" LED indicator when wireless charging is working.

Green LED last for 3 seconds and turns off when the wireless charger is in operation. GREEN twinkles when a foreign object is detected.

Note: Working temperature

It is normal for some heat output during the charging process. Please remove the device after fully charged.

User Manual

Troubleshooting

PROBLEM	SOLUTION
Charging is slow	<ul style="list-style-type: none">• Check if cable is connected correctly• Ensure using QC2.0/QC3.0 adapter.
Phone or device has not charged	<ul style="list-style-type: none">• Ensure phone is placed correctly on the + in the middle of top surface.• Power ON/OFF your phone and retry• Check your phone or device is Qi wireless charge enabled.
Device or Wireless Charger is very warm	<ul style="list-style-type: none">• Check using correct adapter.• Do not cover both phone and wireless charger during charging.



www.iBright.com.au



Join us on our socials @iBrightAu

iBright